





**GENERAL RUBBER (THAILAND) CO.,LTD**

9/17 Moo.4 Tambon Nuen Phra, Amphur Muang Rayong, Rayong

**STATEWIDE TIRES INC.**

**EXCLUSIVE REPRESENTATIVE IN NORTH AMERICA**

1900 W Garvey Ave S Ste#260 West Covina, CA 91790

Tel: (626) 337-9888 Toll-free 888-TBB-1911



**GENERAL RUBBER (THAILAND) CO.,LTD**



# CONTENTS

## ABOUT US 01/04

|                         |       |
|-------------------------|-------|
| ENTERPRISE INTRODUCTION | 01/02 |
| GS COMPANY DEVELOPMENTS | 03    |
| CORPORATE SCALE         | 04    |

## PRODUCT PROFILE 05/24

|                 |       |
|-----------------|-------|
| CORPORATE SCALE |       |
| TP-16 / GP-16   | 07/09 |
| TR-66 / GR-66   | 10/12 |
| TX-01 / GX-01   | 13/14 |
| TS-07 H / T     | 15/16 |
| TS-37 A / T     | 17/19 |
| TS-67 M / T     | 20/22 |
| TS-57 R / T     | 23/24 |



## ABOUT US

### ENTERPRISE Introduction

Located in Thai-Chinese Rayong Industrial Zone which is close to Bangkok and Laem Chabang Port, General Rubber (Thailand) Co.,Ltd is wholly owned by a Chinese listed company Jiangsu General Science Technology Co., Ltd (GS). Founded in 2002 and listed on the Shanghai Stock Exchange in September 2016, GS is a modern high-tech enterprise mainly engaged in the research, development, production and sales of radial tires.

In 2018, GS has made a \$300 million investment to establish an tyre-manufacturing base which meets Chinese industrial policy of the Belt and Road. The manufacturing base covers area of 510 thousand square meters with production capacity of 1 million pieces of all steel radial tires and 6 million pieces of half steel radial tires. The products positions the high-performance radial tires with low-carbon and eco-friendly features and will be mainly sold to the United States, Europe and other Southeast Asian countries. The Project requires 2000 staff, which will recruit more than 1500 locals for Thailand.

In the future, GS will always adhere to its strategic mission of “contributing to the society with the best cost-effective products” and the core values of “honesty, gratitude, innovation and excellence”, continuously promote the “three internationalization” of talents, marketing and research and development, continue to improve the Company's operational capacity, improve the industrial layout and promote industrial updating by means of connotative growth and outward expansion, so as to build it into a China tire model enterprise with international influence.

GS COMPANY(CHINA)developments

And the development of GS company its own, is also legendary & with great hardship.  
GS Company Shanghai Stock Exchange Stock Code: 601500  
In 2017, GS Company begins its PCR sales home & abroad.

1995

First motorcycle tire plant

1998

Began producing bias tires

2002

Establishment of Wuxi General Rubber Co.

2004

In July, first TBR produced

2010

Formation of provincial R&D Center

2011

In December, second TBR plant, adding 2 million production per year.

2013

TBBTIRES TBR, had sold 50,000 units in the U.S.

2016

GS listed in the Shanghai Stock Exchange



# PRODUCT PROFILE


The new journey of life  
Any rugged road is kind of experience







## Performance

## Characteristics





### Quiet Ride

The multi-pitch frequency conversion pattern design, optimized by computer simulation, makes the sound energy disperse evenly to a wider frequency range, avoids the energy gathering in the frequency band which is easily perceived by the human ear. The advantage, driving quietly.

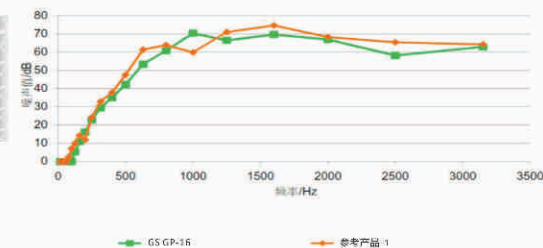


## Cost-effective with Long Endurance

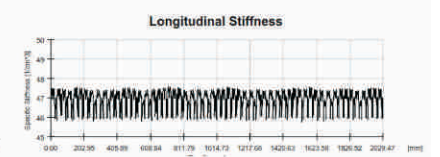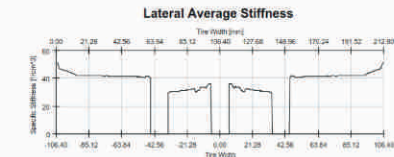



- Wear-resistant tread formula can effectively improve mileage and service life. low rolling resistance, more cost-effective and fuel-saving.
- Tread reinforced block reduces rolling resistance, more cost-effective and fuel saving.
- Simulation optimized pattern ensure better handling performance.



## Comfort and Safety



- Wide drainage groove design:  
Wide drainage groove design is adopted to improve drainage performance of wet and slippery environment in rainy days.
- Continuous streamlined transverse pattern groove design:  
Continuous streamlined transverse pattern grooves evacuate water more effectively. The herringbone groove cut the water film effectively. much safer on both dry and wet ground.
- Computer simulation analysis improves tire traction on both dry and wet ground.

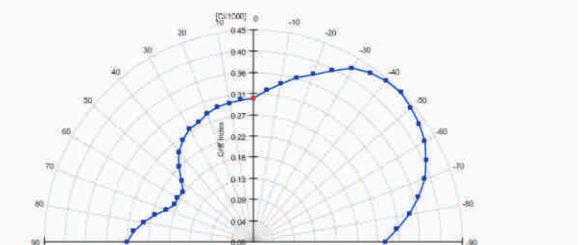

TP-16/GP-16

TR-66/GR-66

| Size | Specification | Load Index | Speed Rating | Reinforced | Standard Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      | Max Pressure |       | UTQG    |
|------|---------------|------------|--------------|------------|--------------|--------------------|-----------------------|--------------------|------|--------------|-------|---------|
|      |               |            |              |            |              |                    |                       | kg                 | LBS  | kPa          | P.S.I |         |
| 15   | 175/65R15     | 84         | H            | -          | 5 J          | 177                | 609                   | 500                | 1102 | 300          | 44    | 360 A A |
|      | 185/55R15     | 82         | V            | -          | 6 J          | 194                | 585                   | 475                | 1047 | 300          | 44    | 360 A A |
|      | 185/60R15     | 88         | H            | XL         | 5 ½ J        | 189                | 603                   | 560                | 1235 | 340          | 49    | 360 A A |
|      | 185/65R15     | 88         | H            | -          | 5 ½ J        | 189                | 621                   | 560                | 1235 | 300          | 44    | 360 A A |
|      | 195/50R15     | 82         | V            | -          | 6 J          | 201                | 577                   | 475                | 1047 | 300          | 44    | 360 A A |
|      | 195/55R15     | 85         | V            | -          | 6 J          | 201                | 595                   | 515                | 1135 | 300          | 44    | 360 A A |
|      | 195/60R15     | 88         | V            | -          | 6 J          | 201                | 615                   | 560                | 1235 | 300          | 44    | 360 A A |
|      | 195/65R15     | 91         | H            | -          | 6 J          | 201                | 635                   | 615                | 1356 | 300          | 44    | 360 A A |
|      | 195/65R15     | 91         | V            | -          | 6 J          | 201                | 635                   | 615                | 1356 | 300          | 44    | 360 A A |
|      | 205/60R15     | 91         | V            | -          | 6 J          | 209                | 627                   | 615                | 1356 | 300          | 44    | 360 A A |
|      | 205/65R15     | 94         | H            | -          | 6 J          | 209                | 647                   | 670                | 1477 | 300          | 44    | 360 A A |
|      | 215/65R15     | 100        | H            | XL         | 6 ½ J        | 221                | 661                   | 800                | 1764 | 340          | 49    | 360 A A |
|      | 215/70R15     | 98         | T            | -          | 6 ½ J        | 221                | 683                   | 750                | 1653 | 300          | 44    | 360 A A |



Silence

Drainage


Stable handling

Comfortable

Strong grip

Performance

Characteristics


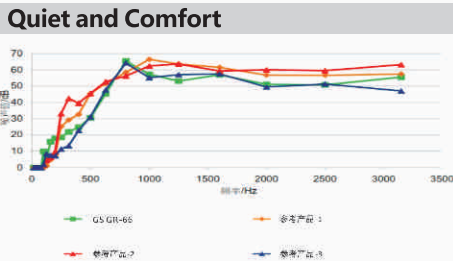


Computer-optimized circumferential layout design, with multi-pitch block pattern, reduces noise effectively.




Accurate Handling

- Asymmetric pattern blocks inside and outside ensure drainage while the outside wide pattern increase ground pressure while turning. The Advantage excellent cornering performance.
- Continuous Central Pattern Rib: The central pattern rib is continuous throughout the whole cycle, ensuring the sensitive and stable handling performance of the tire at high speed in straight line.
- Simulation optimized pattern ensure better handling performance.

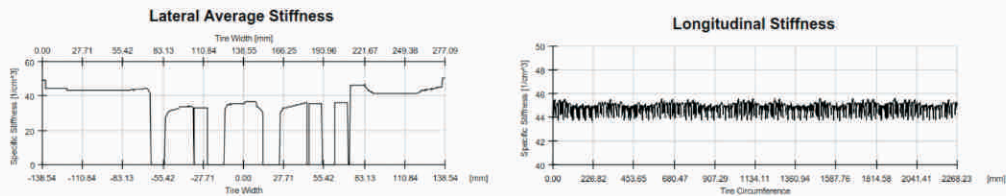

Excellent on Dry and Wet Ground

- Four wide drainage longitudinal grooves, evacuate water timely under wetland conditions, to prevent aquaplaning;
- Small ditches cooperate with transverse grooves cut water film effectively and improve wetland performance. special tread formula design ensures excellent dry and wet operation performance.
- Computer simulation analysis improves tire traction on both dry and wet ground.

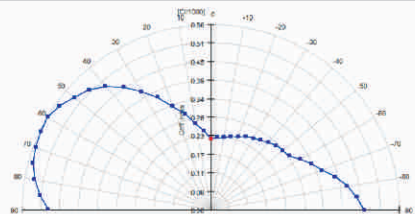

| Size | Specification | Load Index | Speed Rating | Reinforced | Standard Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      | Max Pressure |       | UTQG    |
|------|---------------|------------|--------------|------------|--------------|--------------------|-----------------------|--------------------|------|--------------|-------|---------|
|      |               |            |              |            |              |                    |                       | kg                 | LBS  | kPa          | P.S.I |         |
| 16   | 185/55R16     | 83         | V            | -          | 6 J          | 194                | 610                   | 487                | 1074 | 300          | 44    | 380 A A |
|      | 195/55R16     | 87         | V            | -          | 6 J          | 201                | 620                   | 545                | 1201 | 300          | 44    | 380 A A |
|      | 205/45ZR16    | 87         | W            | XL         | 7 J          | 206                | 590                   | 545                | 1201 | 340          | 49    | 380 A A |
|      | 205/50ZR16    | 87         | W            | -          | 6 1/2 J      | 214                | 612                   | 545                | 1201 | 300          | 44    | 380 A A |
|      | 205/55R16     | 91         | V            | -          | 6 1/2 J      | 214                | 632                   | 615                | 1356 | 300          | 44    | 380 A A |
|      | 205/55ZR16    | 91         | W            | -          | 6 1/2 J      | 214                | 632                   | 615                | 1356 | 300          | 44    | 380 A A |
|      | 205/55ZR16    | 94         | W            | XL         | 6 1/2 J      | 214                | 632                   | 670                | 1477 | 340          | 49    | 380 A A |
|      | 205/60R16     | 92         | H            | -          | 6 J          | 209                | 652                   | 630                | 1389 | 300          | 44    | 380 A A |
|      | 205/65R16     | 95         | H            | -          | 6 J          | 209                | 672                   | 690                | 1521 | 300          | 44    | 380 A A |
|      | 215/55ZR16    | 97         | W            | XL         | 7 J          | 226                | 642                   | 730                | 1609 | 340          | 49    | 380 A A |
|      | 215/60R16     | 95         | H            | -          | 6 1/2 J      | 221                | 664                   | 690                | 1521 | 300          | 44    | 380 A A |
|      | 225/50ZR16    | 92         | W            | -          | 7 J          | 233                | 632                   | 630                | 1389 | 300          | 44    | 380 A A |
|      | 225/55ZR16    | 99         | W            | XL         | 7 J          | 233                | 654                   | 775                | 1709 | 340          | 49    | 380 A A |
|      | 225/60R16     | 98         | V            | -          | 6 1/2 J      | 228                | 676                   | 750                | 1653 | 300          | 44    | 380 A A |
|      | 235/60R16     | 100        | H            | -          | 7 J          | 240                | 688                   | 800                | 1764 | 300          | 44    | 380 A A |

|    |            |     |   |    |         |     |     |      |      |     |    |         |
|----|------------|-----|---|----|---------|-----|-----|------|------|-----|----|---------|
| 17 | 205/40ZR17 | 84  | W | XL | 7 1/2 J | 212 | 596 | 500  | 1102 | 340 | 49 | 380 A A |
|    | 205/45ZR17 | 88  | W | XL | 7 J     | 206 | 616 | 560  | 1235 | 340 | 49 | 380 A A |
|    | 205/50ZR17 | 93  | W | XL | 6 1/2 J | 214 | 638 | 650  | 1433 | 340 | 49 | 380 A A |
|    | 215/45ZR17 | 91  | W | XL | 7 J     | 213 | 626 | 615  | 1356 | 340 | 49 | 380 A A |
|    | 215/50ZR17 | 95  | W | XL | 7 J     | 226 | 648 | 690  | 1521 | 340 | 49 | 380 A A |
|    | 215/55ZR17 | 98  | W | XL | 7 J     | 226 | 668 | 750  | 1653 | 340 | 49 | 380 A A |
|    | 225/45ZR17 | 94  | W | XL | 7 1/2 J | 225 | 634 | 670  | 1477 | 340 | 49 | 380 A A |
|    | 225/50ZR17 | 98  | W | XL | 7 J     | 233 | 658 | 750  | 1653 | 340 | 49 | 380 A A |
|    | 225/55ZR17 | 101 | W | XL | 7 J     | 233 | 680 | 825  | 1819 | 340 | 49 | 380 A A |
|    | 235/45ZR17 | 97  | W | XL | 8 J     | 236 | 644 | 730  | 1609 | 340 | 49 | 380 A A |
| 18 | 235/50ZR17 | 100 | W | XL | 7 1/2 J | 245 | 668 | 800  | 1764 | 340 | 49 | 380 A A |
|    | 235/55ZR17 | 103 | W | XL | 7 1/2 J | 245 | 690 | 875  | 1929 | 340 | 49 | 380 A A |
|    | 245/40ZR17 | 95  | W | XL | 8 1/2 J | 248 | 628 | 690  | 1521 | 340 | 49 | 380 A A |
|    | 245/45ZR17 | 99  | W | XL | 8 J     | 243 | 652 | 775  | 1709 | 340 | 49 | 380 A A |
|    | 215/40ZR18 | 89  | W | XL | 7 1/2 J | 218 | 629 | 580  | 1279 | 340 | 49 | 380 A A |
|    | 225/40ZR18 | 92  | W | XL | 8 J     | 230 | 637 | 630  | 1389 | 340 | 49 | 380 A A |
|    | 225/45ZR18 | 95  | W | XL | 7 1/2 J | 225 | 659 | 690  | 1521 | 340 | 49 | 380 A A |
|    | 225/55ZR18 | 102 | W | XL | 7 J     | 233 | 705 | 850  | 1874 | 340 | 49 | 380 A A |
|    | 235/40ZR18 | 95  | W | XL | 8 1/2 J | 241 | 645 | 690  | 1521 | 340 | 49 | 380 A A |
|    | 235/45ZR18 | 98  | W | XL | 8 J     | 236 | 669 | 750  | 1653 | 340 | 49 | 380 A A |
| 19 | 235/50ZR18 | 101 | W | XL | 7 1/2 J | 245 | 693 | 825  | 1819 | 340 | 49 | 380 A A |
|    | 245/40ZR18 | 97  | W | XL | 8 1/2 J | 248 | 653 | 730  | 1609 | 340 | 49 | 380 A A |
|    | 245/45ZR18 | 100 | W | XL | 8 J     | 243 | 677 | 800  | 1764 | 340 | 49 | 380 A A |
|    | 245/60R18  | 105 | V | -  | 7 J     | 248 | 751 | 925  | 2039 | 300 | 44 | 380 A A |
|    | 255/35ZR18 | 94  | W | XL | 9 J     | 260 | 635 | 670  | 1477 | 340 | 49 | 380 A A |
|    | 225/35ZR19 | 88  | W | XL | 8 J     | 230 | 641 | 560  | 1235 | 340 | 49 | 380 A A |
|    | 225/40ZR19 | 93  | W | XL | 8 J     | 230 | 663 | 650  | 1433 | 340 | 49 | 380 A A |
|    | 235/35ZR19 | 91  | W | XL | 8 1/2 J | 241 | 647 | 615  | 1356 | 340 | 49 | 380 A A |
|    | 235/40ZR19 | 96  | W | XL | 8 1/2 J | 241 | 671 | 710  | 1565 | 340 | 49 | 380 A A |
|    | 245/35ZR19 | 93  | W | XL | 8 1/2 J | 248 | 655 | 650  | 1433 | 340 | 49 | 380 A A |
| 20 | 245/40ZR19 | 98  | W | XL | 8 1/2 J | 248 | 679 | 750  | 1653 | 340 | 49 | 380 A A |
|    | 245/45ZR19 | 102 | W | XL | 8 J     | 243 | 703 | 850  | 1874 | 340 | 49 | 380 A A |
|    | 245/45ZR19 | 102 | Y | XL | 8 J     | 243 | 703 | 850  | 1874 | 340 | 49 | 380 A A |
|    | 225/30ZR20 | 85  | W | XL | 8 J     | 230 | 644 | 515  | 1135 | 340 | 49 | 380 A A |
|    | 225/35ZR20 | 93  | W | XL | 8 J     | 230 | 666 | 650  | 1433 | 340 | 49 | 380 A A |
|    | 235/35ZR20 | 92  | W | XL | 8 1/2 J | 241 | 672 | 630  | 1389 | 340 | 49 | 380 A A |
|    | 245/35ZR20 | 95  | W | XL | 8 1/2 J | 248 | 680 | 690  | 1521 | 340 | 49 | 380 A A |
|    | 245/40ZR20 | 99  | W | XL | 8 1/2 J | 248 | 704 | 775  | 1709 | 340 | 49 | 380 A A |
|    | 245/45ZR20 | 103 | W | XL | 8 J     | 243 | 728 | 875  | 1929 | 340 | 49 | 380 A A |
|    | 255/35ZR20 | 97  | W | XL | 9 J     | 260 | 686 | 730  | 1609 | 340 | 49 | 380 A A |
|    | 255/45ZR20 | 105 | W | XL | 8 1/2 J | 255 | 738 | 925  | 2039 | 340 | 49 | 380 A A |
|    | 275/30ZR20 | 97  | W | XL | 9 1/2 J | 278 | 674 | 730  | 1609 | 340 | 49 | 380 A A |
|    | 275/35ZR20 | 102 | W | XL | 9 1/2 J | 278 | 700 | 850  | 1874 | 340 | 49 | 380 A A |
|    | 275/40ZR20 | 106 | W | XL | 9 1/2 J | 278 | 728 | 950  | 2094 | 340 | 49 | 380 A A |
|    | 275/45R20  | 110 | V | XL | 9 J     | 273 | 756 | 1060 | 2337 | 340 | 49 | 380 A A |
|    | 285/50R20  | 112 | V | -  | 9 J     | 297 | 794 | 1120 | 2469 | 300 | 44 | 380 A A |




Performance



Characteristics

Superior Dynamic Performance




Pulse type design:

- Dynamic appearance, while providing more excellent drainage and prevent aquaplaning;
- Wide patterned blocks with wide pattern grooves, sharp appearance with sporty feeling.


Excellent Handling

- Accurate steering response provides better handling and stronger grip.
- Large shoulder block pattern ensures excellent grip.
- Shorter braking distance in normal weather conditions.
- Simulation optimized pattern ensure better handling performance.

Longitudinal Average Stiffness




Longitudinal Stiffness



Driving Safety

- Excellent drainage performance: Four broad main grooves are designed to play an excellent role in drainage and anti-skid.
- Asymmetric pattern design with leading edge in handling performance both of wet and dry conditions;
- Excellent grip and handling performance while cornering to ensure the safety.
- Computer simulation analysis improves tire traction on both dry and wet ground.

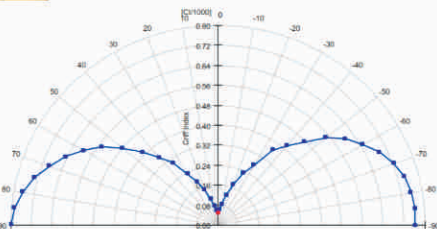


| Size | Specification | Load Index | Speed Rating | Reinforced | Standard Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      | Max Pressure |       | UTQG    |
|------|---------------|------------|--------------|------------|--------------|--------------------|-----------------------|--------------------|------|--------------|-------|---------|
|      |               |            |              |            |              |                    |                       | kg                 | LBS  | kPa          | P.S.I |         |
| 20   | 265/50R20     | 111        | V            | XL         | 8 1/2 J      | 277                | 774                   | 1090               | 2403 | 340          | 49    | 400 A A |
| 22   | 235/30ZR22    | 90         | W            | XL         | 8 1/2 J      | 241                | 701                   | 600                | 1323 | 340          | 49    | 400 A A |
|      | 245/30ZR22    | 92         | W            | XL         | 8 1/2 J      | 248                | 707                   | 630                | 1389 | 340          | 49    | 400 A A |
|      | 255/30ZR22    | 95         | Y            | XL         | 9 J          | 260                | 713                   | 690                | 1521 | 340          | 49    | 400 A A |
|      | 265/35R22     | 102        | V            | XL         | 9 1/2 J      | 271                | 745                   | 850                | 1874 | 340          | 49    | 400 A A |
|      | 265/40R22     | 106        | V            | XL         | 9 1/2 J      | 271                | 771                   | 950                | 2094 | 340          | 49    | 400 A A |
|      | 285/35ZR22    | 106        | W            | XL         | 10 J         | 290                | 759                   | 950                | 2094 | 340          | 49    | 400 A A |
|      | 285/35ZR22    | 106        | Y            | XL         | 10 J         | 290                | 759                   | 950                | 2094 | 340          | 49    | 400 A A |
|      | 305/40R22     | 114        | V            | XL         | 11 J         | 313                | 803                   | 1180               | 2601 | 340          | 49    | 400 A A |
| 24   | 305/45R22     | 118        | V            | XL         | 10 J         | 303                | 833                   | 1320               | 2910 | 340          | 49    | 400 A A |
|      | 255/30ZR24    | 97         | W            | XL         | 9 J          | 260                | 764                   | 730                | 1609 | 340          | 49    | 400 A A |
|      | 275/25ZR24    | 96         | W            | XL         | 10 J         | 283                | 748                   | 710                | 1565 | 340          | 49    | 400 A A |
|      | 275/30ZR24    | 101        | W            | XL         | 9 1/2 J      | 278                | 776                   | 825                | 1819 | 340          | 49    | 400 A A |
|      | 295/35R24     | 110        | V            | XL         | 10 1/2 J     | 301                | 816                   | 1060               | 2337 | 340          | 49    | 400 A A |
| 26   | 305/35R24     | 112        | V            | XL         | 11 J         | 313                | 824                   | 1120               | 2469 | 340          | 49    | 400 A A |
|      | 305/30ZR26    | 109        | W            | XL         | 11 J         | 313                | 844                   | 1030               | 2271 | 340          | 49    | 400 A A |



Performance



Characteristics




Quiet and Comfort


Optimized variable pitch combination design reduces noise effectively and brings quiet driving experience.



Accurate Handling

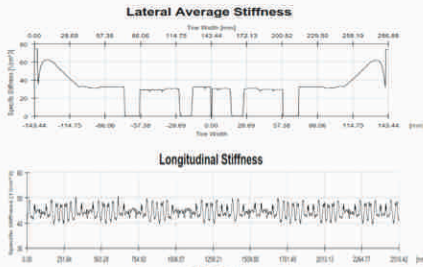

Dry and Wet Ground Safety

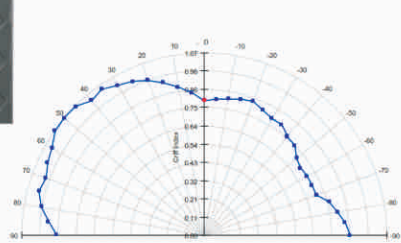

- Structural reinforcement of pattern groove bottom improves handling stability effectively.
- Variable 3D pattern groove design provides comfortable and smooth driving experience.
- Simulation optimized pattern ensure better handling performance.
- High density slots design and special formula shortens braking distance either in dry and wet condition.
- Unique durable tread formula ensures greater tread life, and provides excellent dry and wet braking performance, drive with confidence.
- Computer simulation analysis improves tire traction on both dry and wet ground.

| Size | Specification | Load Index | Speed Rating | Reinforced | Standard Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      | Max Pressure |       | UTQG    |
|------|---------------|------------|--------------|------------|--------------|--------------------|-----------------------|--------------------|------|--------------|-------|---------|
|      |               |            |              |            |              |                    |                       | kg                 | LBS  | kPa          | P.S.I |         |
| 15   | 235/75R15     | 109        | T            | XL         | 6 1/2 J      | 235                | 733                   | 1030               | 2271 | 340          | 49    | 420 A A |
|      | 215/65R16     | 98         | H            | -          | 6 1/2 J      | 221                | 686                   | 750                | 1653 | 300          | 44    | 420 A A |
|      | 215/70R16     | 100        | H            | -          | 6 1/2 J      | 221                | 708                   | 800                | 1764 | 300          | 44    | 420 A A |
|      | 225/70R16     | 103        | T            | -          | 6 1/2 J      | 228                | 722                   | 875                | 1929 | 300          | 44    | 420 A A |
|      | 225/70R16     | 103        | H            | -          | 6 1/2 J      | 228                | 722                   | 875                | 1929 | 300          | 44    | 420 A A |
|      | 235/65R16     | 107        | H            | XL         | 7 J          | 240                | 712                   | 975                | 2149 | 340          | 49    | 420 A A |
|      | 235/70R16     | 106        | T            | -          | 7 J          | 240                | 736                   | 950                | 2094 | 300          | 44    | 420 A A |
|      | 245/70R16     | 111        | T            | XL         | 7 J          | 248                | 750                   | 1090               | 2403 | 340          | 49    | 420 A A |
|      | 255/70R16     | 111        | H            | -          | 7 1/2 J      | 260                | 764                   | 1090               | 2403 | 300          | 44    | 420 A A |
| 16   | 265/70R16     | 112        | T            | -          | 8 J          | 272                | 778                   | 1120               | 2469 | 300          | 44    | 420 A A |
|      | 215/60R17     | 96         | H            | -          | 6 1/2 J      | 221                | 690                   | 710                | 1565 | 300          | 44    | 420 A A |
|      | 215/60R17     | 96         | V            | -          | 6 1/2 J      | 221                | 690                   | 710                | 1565 | 300          | 44    | 420 A A |
|      | 225/60R17     | 99         | H            | -          | 6 1/2 J      | 228                | 702                   | 775                | 1709 | 300          | 44    | 420 A A |
|      | 225/60R17     | 99         | V            | -          | 6 1/2 J      | 228                | 702                   | 775                | 1709 | 300          | 44    | 420 A A |
|      | 225/65R17     | 102        | T            | -          | 6 1/2 J      | 228                | 724                   | 850                | 1874 | 300          | 44    | 420 A A |
|      | 235/60R17     | 102        | H            | -          | 7 J          | 240                | 714                   | 850                | 1874 | 300          | 44    | 420 A A |
|      | 235/65R17     | 108        | H            | XL         | 7 J          | 240                | 738                   | 1000               | 2205 | 340          | 49    | 420 A A |
|      | 245/65R17     | 107        | H            | -          | 7 J          | 248                | 750                   | 975                | 2149 | 300          | 44    | 420 A A |
| 17   | 245/70R17     | 110        | H            | -          | 7 J          | 248                | 776                   | 1060               | 2337 | 300          | 44    | 420 A A |
|      | 265/70R17     | 115        | T            | -          | 8 J          | 272                | 804                   | 1215               | 2679 | 300          | 44    | 420 A A |
|      | 235/55R18     | 104        | V            | XL         | 7 1/2 J      | 245                | 715                   | 900                | 1984 | 340          | 49    | 420 A A |
|      | 235/60R18     | 107        | V            | XL         | 7 J          | 240                | 739                   | 975                | 2149 | 340          | 49    | 420 A A |
|      | 255/55ZR18    | 109        | W            | XL         | 8 J          | 265                | 737                   | 1030               | 2271 | 340          | 49    | 420 A A |
|      | 265/60R18     | 110        | H            | -          | 8 J          | 272                | 775                   | 1060               | 2337 | 300          | 44    | 420 A A |
|      | 275/60R20     | 115        | T            | -          | 8 J          | 279                | 838                   | 1215               | 2679 | 300          | 44    | 420 A A |



## Performance



## Characteristics




### Variable Pitch Pattern

Variable pitch combination is optimized by computer simulation to reduce tire noise at high speed.



### Strong Grip Power

- The design of zigzag ditch pattern is fit for various severe road conditions.
- Design of continuous inclined grooves provides effective drainage function and stable grip.




### Wear-Resistant Formula

The new wear-resistant formula provides long driving mileage under severe road conditions.




### Stiff & Sharp Shoulder


- Zigzag tooth shoulder design provides strong grip and traction capacity, even in muddy field.
- Thick three-dimensional sidewall protection structure strengthens cutting resistance and protects sidewall against impact.



### Simulation Optimized Pattern

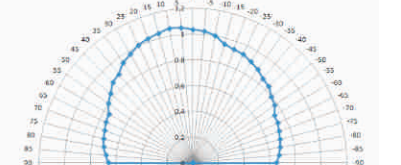

The strength of each pattern block is optimized by computer simulation. Each pattern block is solid and powerful, which can cope with various harsh environments and ensure the traction ability of tires.

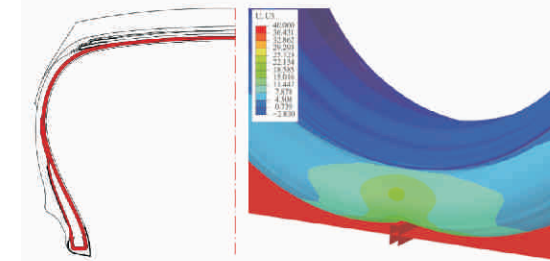

### Reinforced Tire Structure

The reinforced tire structure and multi-layer matrix material work together to improve the tire strength and passing performance with computer simulation.


TS-37 A / T

| Size | Specification | PR   | Load Index | Speed Rating | Reinforced | Standard Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      |      |      | Max Pressure |       | UTQG    | Sidewall Style |
|------|---------------|------|------------|--------------|------------|--------------|--------------------|-----------------------|--------------------|------|------|------|--------------|-------|---------|----------------|
|      |               |      |            |              |            |              |                    |                       | Single             |      | Dual |      |              |       |         |                |
|      |               |      |            |              |            |              |                    |                       | kg                 | LBS  | kg   | LBS  | kPa          | P.S.I |         |                |
| 15   | LT235/75R15   | 6PR  | 104/101    | S            | -          | 6 ½ J        | 235                | 739                   | 900                | 1985 | 825  | 1820 | 350          | 50    | -       | White          |
|      | 31x10.50R15LT | 6PR  | 109        | S            | -          | 8 ½ J        | 268                | 781                   | 1030               | 2270 | -    | -    | 350          | 50    | -       | White          |
| 16   | LT215/85R16   | 10PR | 115/112    | S            | -          | 6 J          | 216                | 778                   | 1215               | 2680 | 1120 | 2470 | 550          | 80    | -       | White          |
|      | LT225/75R16   | 10PR | 115/112    | S            | -          | 6 J          | 223                | 750                   | 1215               | 2680 | 1120 | 2470 | 550          | 80    | -       | White          |
|      | 235/70R16     | -    | 106        | T            | -          | 7 J          | 240                | 736                   | 950                | 2094 | -    | -    | 300          | 44    | 560 A B | Black          |
|      | LT235/85R16   | 10PR | 120/116    | S            | -          | 6 ½ J        | 235                | 812                   | 1380               | 3042 | 1260 | 2778 | 550          | 80    | -       | White          |
|      | 245/70R16     | -    | 107        | T            | -          | 7 J          | 248                | 750                   | 975                | 2149 | -    | -    | 300          | 44    | 560 A B | White          |
|      | 245/70R16     | -    | 107        | H            | -          | 7 J          | 248                | 750                   | 975                | 2149 | -    | -    | 300          | 44    | 560 A B | White          |
|      | LT245/75R16   | 10PR | 120/116    | S            | -          | 7 J          | 248                | 780                   | 1380               | 3042 | 1260 | 2778 | 550          | 80    | -       | White          |
|      | 265/70R16     | -    | 112        | T            | -          | 8 J          | 272                | 778                   | 1120               | 2469 | -    | -    | 300          | 44    | 560 A B | Black          |
|      | LT265/70R16   | 10PR | 121/118    | S            | -          | 8 J          | 272                | 784                   | 1450               | 3195 | 1320 | 2910 | 550          | 80    | -       | White          |
|      | LT265/75R16   | 10PR | 123/120    | R            | -          | 7 ½ J        | 267                | 810                   | 1550               | 3415 | 1400 | 3085 | 550          | 80    | -       | White          |
|      | LT265/75R16   | 10PR | 123/120    | S            | -          | 7 ½ J        | 267                | 810                   | 1550               | 3415 | 1400 | 3085 | 550          | 80    | -       | White          |
|      | 275/70R16     | -    | 114        | S            | -          | 8 J          | 279                | 792                   | 1180               | 2601 | -    | -    | 300          | 44    | 560 A B | Black          |
|      | LT285/75R16   | 10PR | 126/123    | R            | -          | 8 J          | 286                | 840                   | 1700               | 3750 | 1550 | 3415 | 550          | 80    | -       | White          |
|      | LT285/75R16   | 10PR | 126/123    | S            | -          | 8 J          | 286                | 840                   | 1700               | 3750 | 1550 | 3415 | 550          | 80    | -       | White          |
| 17   | 225/65R17     | -    | 102        | H            | -          | 6 ½ J        | 228                | 724                   | 850                | 1874 | -    | -    | 300          | 44    | 560 A B | White          |
|      | LT245/70R17   | 10PR | 119/116    | S            | -          | 7 J          | 248                | 782                   | 1360               | 3000 | 1250 | 2755 | 550          | 80    | -       | White          |
|      | LT245/75R17   | 10PR | 121/118    | S            | -          | 7 J          | 248                | 806                   | 1450               | 3195 | 1320 | 2910 | 550          | 80    | -       | White          |
|      | 265/65R17     | -    | 112        | S            | -          | 8 J          | 272                | 776                   | 1120               | 2469 | -    | -    | 300          | 44    | 560 A B | Black          |
|      | P265/70R17    | -    | 113        | T            | -          | 8 J          | 272                | 804                   | 1150               | 2535 | -    | -    | 300          | 44    | 560 A B | White          |
|      | LT265/70R17   | 10PR | 121/118    | S            | -          | 8 J          | 272                | 810                   | 1450               | 3195 | 1320 | 2910 | 550          | 80    | -       | White          |
|      | LT285/70R17   | 10PR | 121/118    | Q            | -          | 8 ½ J        | 292                | 838                   | 1450               | 3195 | 1320 | 2910 | 550          | 80    | -       | White          |
|      | LT285/70R17   | 10PR | 121/118    | R            | -          | 8 ½ J        | 292                | 838                   | 1450               | 3195 | 1320 | 2910 | 550          | 80    | -       | White          |
| 18   | P265/60R18    | -    | 109        | T            | -          | 8 J          | 272                | 775                   | 1030               | 2271 | -    | -    | 300          | 44    | 560 A B | White          |
|      | LT275/65R18   | 10PR | 123/120    | S            | -          | 8 J          | 279                | 821                   | 1550               | 3415 | 1400 | 3085 | 550          | 80    | -       | White          |
|      | LT275/70R18   | 10PR | 125/122    | R            | -          | 8 J          | 279                | 849                   | 1650               | 3640 | 1500 | 3305 | 550          | 80    | -       | White          |
|      | LT275/70R18   | 10PR | 125/122    | S            | -          | 8 J          | 279                | 849                   | 1650               | 3640 | 1500 | 3305 | 550          | 80    | -       | White          |
| 20   | 275/55R20     | -    | 117        | H            | XL         | 8 ½ J        | 284                | 810                   | 1285               | 2833 | -    | -    | 340          | 49    | 560 A B | White          |
|      | LT275/65R20   | 10PR | 126/123    | S            | -          | 8 J          | 279                | 872                   | 1700               | 3750 | 1550 | 3415 | 550          | 80    | -       | White          |
|      | 35x12.50R20LT | 12PR | 125        | R            | -          | 10 J         | 318                | 883                   | 1650               | 3640 | -    | -    | 550          | 80    | -       | White          |
| 22   | 285/45R22     | -    | 114        | H            | XL         | 9 ½ J        | 285                | 815                   | 1180               | 2601 | -    | -    | 340          | 49    | 560 A B | Black          |
|      | 33x12.50R22LT | 12PR | 114        | S            | -          | 10 J         | 318                | 832                   | 1180               | 2600 | -    | -    | 550          | 80    | -       | Black          |
|      | 35x12.50R22LT | 12PR | 121        | R            | -          | 10 J         | 318                | 883                   | 1450               | 3195 | -    | -    | 550          | 80    | -       | White          |


TS-67 M / T



Performance

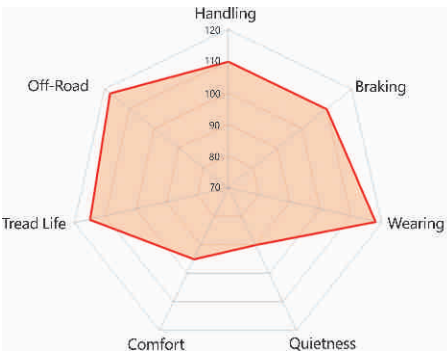


Characteristics



Unique Groove Layout:

- Horizontally arranged grooves prevent splitting.
- Staggered tread formation adds sharp appearance and traction capabilities.
- Uniformed tread surface ensures maximum road contact and traction.



Durable Large Blocks:

- Large blocks for rough appearances
- Provide more contact points with the road surface for better handling, while minimizing noise.



Unique Shoulder Tread Layout:

- Aggressive shoulder to sidewall blocks for better tractions.
- Wide and functional shoulder layout provides exceptional off-road capability and to self-clean of foreign objects.
- Three-dimensional upper sidewall edges add sharper appearance and better sidewall protection.



Stone Ejectors:

Protect the grooves from stone drilling while maintaining traction.



Ply Reinforced Sidewall

Optimized 3 ply construction provides extra protection against impact, overall usage, and handling.

| Size | Specification | PR   | Load Index | Speed Rating | Reinforced | Standard Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      |      |      | Max Pressure |      | UTQG |
|------|---------------|------|------------|--------------|------------|--------------|--------------------|-----------------------|--------------------|------|------|------|--------------|------|------|
|      |               |      |            |              |            |              |                    |                       | Single             |      | Dual |      |              |      |      |
|      |               |      |            |              |            |              |                    |                       | kg                 | LBS  | kg   | LBS  | kPa          | PS.I |      |
| 15   | 33X12.50R15LT | 6PR  | 108        | Q            | -          | 10 J         | 318                | 832                   | 1000               | 2205 | -    | -    | 250          | 35   | -    |
|      | 35X12.50R15LT | 6PR  | 113        | Q            | -          | 10 J         | 318                | 883                   | 1150               | 2535 | -    | -    | 250          | 35   | -    |
| 17   | LT285/70R17   | 10PR | 121/118    | Q            | -          | 8 ½ J        | 292                | 838                   | 1450               | 3195 | 1320 | 2910 | 550          | 80   | -    |
|      | 33X12.50R17LT | 10PR | 120        | Q            | -          | 10 J         | 318                | 832                   | 1400               | 3085 | -    | -    | 450          | 65   | -    |
|      | 35X12.50R17LT | 10PR | 121        | Q            | -          | 10 J         | 318                | 883                   | 1450               | 3195 | -    | -    | 450          | 65   | -    |
| 18   | 33X12.50R18LT | 10PR | 118        | Q            | -          | 10 J         | 318                | 832                   | 1320               | 2910 | -    | -    | 450          | 65   | -    |
|      | 35X12.50R18LT | 10PR | 123        | Q            | -          | 10 J         | 318                | 883                   | 1550               | 3415 | -    | -    | 450          | 65   | -    |
| 20   | LT285/55R20   | 10PR | 122/119    | Q            | -          | 9 J          | 297                | 822                   | 1500               | 3307 | 1360 | 2998 | 550          | 80   | -    |
|      | 33X12.50R20LT | 10PR | 114        | Q            | -          | 10 J         | 318                | 832                   | 1180               | 2600 | -    | -    | 450          | 65   | -    |
|      | 35X12.50R20LT | 10PR | 121        | Q            | -          | 10 J         | 318                | 883                   | 1450               | 3195 | -    | -    | 450          | 65   | -    |
|      | 37X13.50R20LT | 12PR | 128        | Q            | -          | 11 J         | 345                | 934                   | 1800               | 3970 | -    | -    | 550          | 80   | -    |
|      | 37X13.50R20LT | 12PR | 128        | R            | -          | 11 J         | 345                | 934                   | 1800               | 3970 | -    | -    | 550          | 80   | -    |
| 22   | 33X12.50R22LT | 12PR | 114        | Q            | -          | 10 J         | 318                | 832                   | 1180               | 2600 | -    | -    | 550          | 80   | -    |
|      | 35X12.50R22LT | 12PR | 121        | Q            | -          | 10 J         | 318                | 883                   | 1450               | 3195 | -    | -    | 550          | 80   | -    |
|      | 37X13.50R22LT | 12PR | 128        | Q            | -          | 11 J         | 345                | 934                   | 1800               | 3970 | -    | -    | 550          | 80   | -    |
| 24   | 35X12.50R24LT | 10PR | 111        | Q            | -          | 10 J         | 318                | 883                   | 1090               | 2405 | -    | -    | 550          | 80   | -    |
|      | 37X13.50R24LT | 12PR | 124        | Q            | -          | 11 J         | 345                | 934                   | 1600               | 3525 | -    | -    | 550          | 80   | -    |



Comfortable


Bad road

Strong Grip

Strength

Jungle Environment

Performance

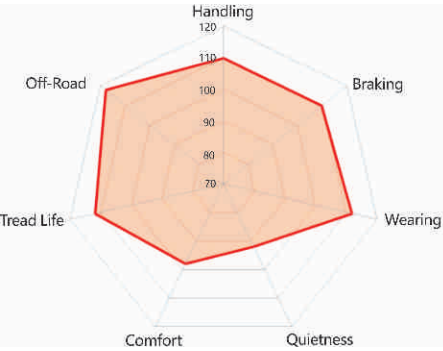


Characteristics




Aggressive Open-shoulder Arrangement

- Reinforced center blocks, arranged to deliver excellent on-road experience.
- Aggressive open-shoulder arrangement adds better off-road capabilities.



Gripping Power

Tread grooves arranged for better traction and handling under severe road conditions.



Unique Tear-resistant Formula

Unique tear-resistant formula created by TBBtires, perform well on unfavorable roads types.




Stone Ejectors

Protect the grooves from stone drilling while maintaining traction.



Rigid and Protected Sidewall

- Ridged shoulder layout creates better traction, even under muddy road conditions.
- Reinforced sidewall and raised protecting patterns to cope with impacts.



3 Ply Reinforced Sidewall

Optimized 3 ply construction provides extra protection against impact, overall usage, and handling.

| Size | Specification | PR   | Load Index | Speed Rating | Reinforced | Standar Rim | Section Width (mm) | overall diameter (mm) | Maximum usage load |      |      |     | Max Pressure |      | UTQG |
|------|---------------|------|------------|--------------|------------|-------------|--------------------|-----------------------|--------------------|------|------|-----|--------------|------|------|
|      |               |      |            |              |            |             |                    |                       | Single             |      | Dual |     |              |      |      |
|      |               |      |            |              |            |             |                    |                       | kg                 | LBS  | kg   | LBS | kPa          | PS.I |      |
| 20   | 33X12.50R20LT | 10PR | 114        | Q            | -          | 10J         | 318                | 832                   | 1180               | 2600 | -    | -   | 450          | 65   | -    |